

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

TEST REPORT

ETSI EN 300 440 V2.2.1 (2018-07)

Report Reference No. : **GTS20191209006-2-32**

Compiled by
(position+printed name+signature) . : File administrators Peter Xiao

Supervised by
(position+printed name+signature) . : Test Engineer Moon Jan

Approved by
(position+printed name+signature) . : Manager Simon Hu

Date of issue : Dec.23, 2019

Representative Laboratory Name : **Shenzhen Global Test Service Co.,Ltd.**

Address : No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name : **Shenzhen Bilian Electronic Co.,Ltd.**

Address : Building B1, Zhongxing Industrial Zone, Juling, Jutang Community, Guanlan street, LongHua district, Shenzhen, China

Test specification

Standard..... : **ETSI EN 300 440 V2.2.1 (2018-07)**

TRF Originator : Shenzhen Global Test Service Co.,Ltd.

Master TRF : Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : **IEEE 802.11a/b/g/n/ac(1T1R)USB WIFI+BT Combo Module**

Trade Mark..... : N/A

Manufacturer : Shenzhen Bilian Electronic Co.,Ltd.

Model/Type reference : BL-M8821CU1

List Model..... : N/A

Operation Frequency : From 5745MHz to 5825MHz

Hardware version..... : 1.1

Software version : V1.1

Ratings..... : DC 3.3V

Result : PASS

TEST REPORT

Test Report No. :	GTS20191209006-2-32	Dec.23, 2019
		Date of issue

Equipment under Test : IEEE 802.11a/b/g/n/ac(1T1R)USB WIFI+BT Combo Module

Model /Type : BL-M8821CU1

Listed Models : N/A

Applicant : **Shenzhen Bilian Electronic Co.,Ltd.**

Address : Building B1, Zhongxing Industrial Zone, Juling, Jutang Community,
Guanlan street, LongHua district, Shenzhen, China

Manufacturer : **Shenzhen Bilian Electronic Co.,Ltd.**

Address : Building B1, Zhongxing Industrial Zone, Juling, Jutang Community,
Guanlan street, LongHua district, Shenzhen, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	TEST STANDARDS	4
2.	SUMMARY	5
	2.1. General Remarks	5
	2.2. Product Description	5
	2.3. Equipment Under Test	6
	2.4. Equipment Under Test	6
	2.5. EUT configuration	6
	2.6. Test summary	6
	2.7. Modifications	6
3.	TEST ENVIRONMENT	7
	3.1. Address of the test laboratory	7
	3.2. Test Facility	7
	3.3. Environmental conditions	7
	3.4. Statement of the measurement uncertainty	7
	3.5. Equipments Used during the Test	8
4.	TEST CONDITIONS AND RESULTS.....	10
	4.1. Equivalent Isotropically Radiated Power (e.i.r.p)	10
	4.2. Permitted Range of Operating Frequencies	14
	4.3. Spurious emissions and cabinet	17
	4.4. Duty cycle	20
	4.5. Receiver Emissions	21
	4.6. ADJACENT CHANNEL SELECTIVITY	22
	4.7. BLOCKING OR DESENSITIZATION	23
5.	TEST SETUP PHOTOS OF THE EUT	24
6.	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	24

1. TEST STANDARDS

The tests were performed according to following standards:

[ETSI EN 300 440 V2.2.1 \(2018-07\)](#) : Short Range Devices (SRD); Radio equipment to be used in the 1 GHz to 40 GHz frequency range; Harmonised Standard for access to radio spectrum

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Dec.13, 2019
Testing commenced on	:	Dec.13, 2019
Testing concluded on	:	Dec.23, 2019

2.2. Product Description

Product Name:	IEEE 802.11a/b/g/n/ac(1T1R)USB WIFI+BT Combo Module
Trade Mark:	N/A
Model/Type reference:	BL-M8821CU1
List Model:	N/A
Model Declaration	N/A
Power supply:	DC 3.3V
Hardware Version	1.1
Software Version	V1.1
Bluetooth	
Frequency Range	2402MHz ~ 2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)
2.4G WLAN	
WLAN CE Operation frequency	IEEE 802.11b:2412-2472MHz IEEE 802.11g:2412-2472MHz IEEE 802.11n HT20:2412-2472MHz IEEE 802.11n HT40:2422-2462MHz
WLAN CE Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Channel number:	13 Channel for IEEE 802.11b/g/n(HT20) 9 Channel for IEEE 802.11n(HT40)
Channel separation:	5MHz
WIFI(5G Band)	
WLAN CE Operation frequency	5180-5240MHz
WLAN CE Modulation Type	802.11a/n/ac: OFDM
Channel number:	4 Channels for 20MHz bandwidth(5180-5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
SRD(5.8G Band)	
WLAN CE Operation frequency	5745-5825MHz
WLAN CE Modulation Type	802.11a/n/ac: OFDM
Channel Number	5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Antenna Description	External Antenna, used for Bluetooth & WIFI TX/RX, 2.0dBi(Max.) for 2.4G Band and 2.0dBi(Max.) for 5G Band

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.3 V

2.4. Equipment Under Test

Description of the test mode

mode	Test channel		
802.11a	5745	5785	5825
802.11 n20	5745	5785	5825
802.11 n40	5755		5795
802.11 ac20	5745	5785	5825
802.11 ac40	5755		5795
802.11 ac80	5775		

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

☐ PC	M/N:	Satellite S40Dt-A
	Manufacturer:	TOSHIBA

2.6. Test summary

ETSI EN 300 440 Requirements			
Equivalent isotropic radiated power(Radiated)	ETSI EN 300 440	Sub-clause 4.2.2	Pass
Permitted range of operating frequencies	ETSI EN 300 440	Sub-clause 4.2.3	Pass
Spurious emissions	ETSI EN 300 440	Sub-clause 4.2.4	Pass
Duty cycle	ETSI EN 300 440	Sub-clause 4.2.5	Pass
Additional requirements for FHSS equipment	ETSI EN 300 440	Sub-clause 4.2.6	N/A
Adjacent channel selectivity	ETSI EN 300 440	Sub-clause 4.3.3	Pass
Blocking or desensitization	ETSI EN 300 440	Sub-clause 4.3.4	Pass
Receiver Spurious emissions	ETSI EN 300 440	Sub-clause 4.3.5	Pass

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature: 25 °C

High Temperature: 50 °C

Low Temperature: -10 °C

Normal Voltage : DC 3.3V

High Voltage:DC 3.6V

Low Voltage: DC 3.0V

Relative Humidity: 55 %

Air Pressure: 989 hPa

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics;Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics;Part 2 " and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Conducted spurious emission	1.60 dB	(1)
Radiated spurious emission	2.20 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Equipments Used during the Test

RF output power&PSD&OOB&OBW &Hopping &Duty Cycle, Tx-sequence, Tx-gap&Adaptively&ReceiverBlocking						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
2	Vector Signal generator	Agilent	N5181A	MY49060502	2019/09/20	2020/09/19
3	Signal generator	Agilent	E4421B	3610AO1069	2019/09/20	2020/09/19
4	4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	TW53323507	2019/09/20	2020/09/19
5	X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY5365004	2019/09/20	2020/09/19
6	Climate Chamber	ESPEC	EL-10KA	A20120523	2019/09/20	2020/09/19
7	Universal Radio Communication	Rohde&Schwarz	CMU200	114353	2019/09/20	2020/09/19
8	Wireless Communication Tester	Rohde&Schwarz	CMW500	125408	2019/09/20	2020/09/19
9	Test Control Unit	Tonscend	JS0806-1	178060067	2019/06/20	2020/06/19
10	Automated filter bank	Tonscend	JS0806-F	19F8060177	2019/06/20	2020/06/19
11	EMI Test software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
12	EMI Test software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/

Transmitter spurious emissions & Receiver spurious emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI 7	101102	2019/09/20	2020/09/19
2	Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
3	Spectrum Analyzer	R&S	FSV40	100019	2019/09/20	2020/09/19
4	By-log Antenna	SCHWARZBECK	VULB9163	000976	2019/05/26	2020/05/25
5	Double Ridged Horn Antenna (1~18GHz)	SCHWARZBECK	BBHA 9120D	01622	2019/09/23	2020/09/22
6	Horn Antenna (18GHz~40GHz)	Schwarzbeck	BBHA9170	791	2019/09/20	2020/09/19
7	Amplifier (30MHz~1GHz)	Schwarzbeck	BBV 9743	#202	2019/09/20	2020/09/19
8	Amplifier (1GHz~18GHz)	Taiwan Chengyi	EMC05184 5B	980355	2019/09/20	2020/09/19

9	Amplifier (26.5GHz~40GHz)	Schwarzbeck	BBV9179	9719-025	2019/09/20	2020/09/19
10	High-Pass Filter	K&L	9SH10-2700/X1275 0-O/O	KL142 031	2019/09/20	2020/09/19
11	High-Pass Filter	K&L	41H10-1375/U1275 0-O/O	KL142 032	2019/09/20	2020/09/19
12	RF Cable	HUBER+SUHNE R	RG214	N/A	2019/09/20	2020/09/19
13	EMI Test software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

The calibration interval is 1 year.

4. TEST CONDITIONS AND RESULTS

4.1. Equivalent Isotropically Radiated Power (e.i.r.p)

LIMIT


According to ETSI EN 300 440 clause 4.2.2.3.2

The transmitter maximum e.i.r.p. under normal and extreme test conditions shall not exceed the values given in table 2.

Table 2: Maximum radiated peak power (e.i.r.p.)

Frequency Bands	Power	Application	Notes
2 400 MHz to 2 483,5 MHz	10 mW e.i.r.p.	Non-specific short range devices	
2 400 MHz to 2 483,5 MHz	25 mW e.i.r.p.	Radio determination devices	
(a) 2 446 MHz to 2 454 MHz	500 mW e.i.r.p.	Radio Frequency Identification (RFID) devices	See also table 4 and annex D
(b) 2 446 MHz to 2 454 MHz	4 W e.i.r.p.	Radio Frequency Identification (RFID) devices	See also table 4 and annex D
5 725 MHz to 5 875 MHz	25 mW e.i.r.p.	Non-specific short range devices	
9 200 MHz to 9 500 MHz	25 mW e.i.r.p.	Radio determination devices	
9 500 MHz to 9 975 MHz	25 mW e.i.r.p.	Radio determination devices	
10,5 GHz to 10,6 GHz	500 mW e.i.r.p.	Radio determination devices	
13,4 GHz to 14,0 GHz	25 mW e.i.r.p.	Radio determination devices	
17,1 GHz to 17,3 GHz	400 mW e.i.r.p.	Radio determination devices	See annex F
24,00 GHz to 24,25 GHz	100 mW e.i.r.p.	Non-specific short range devices and Radio determination devices	

TEST CONFIGURATION

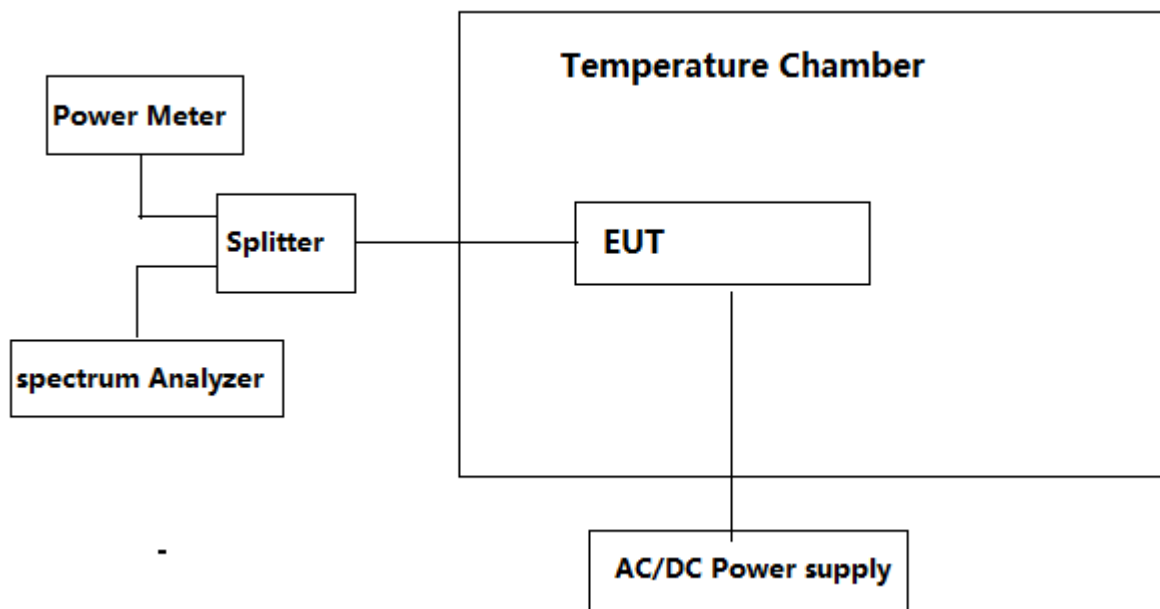

TEST PROCEDURE

1. Please refer to ETSI EN 300 440 clause 5 for the test conditions.
2. Please refer to ETSI EN 300 440 clause 4.2.2.3 for the measurement method.

TEST RESULTS

802.11a							
Test conditions		Channel/ Frequency	Measured power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)	Limit (dBm)	Result
Temperature (°C)	Voltage (V)						
TNor(+25°C)	DC 3.3V	5745	8.38	2.00	10.38	14.00	PASS
Tmin(-10°C)	DC 3.6V		8.55	2.00	10.55		
	DC 3.0V		8.77	2.00	10.77		
TMax(+50°C)	DC 3.6V		8.83	2.00	10.83		
	DC 3.0V		8.75	2.00	10.75		
TNor(+25°C)	DC 3.3V	5785	8.13	2.00	10.13		
Tmin(-10°C)	DC 3.6V		8.57	2.00	10.57		
	DC 3.0V		8.37	2.00	10.37		
TMax(+50°C)	DC 3.6V		8.08	2.00	10.08		
	DC 3.0V		8.53	2.00	10.53		
TNor(+25°C)	DC 3.3V	5825	8.23	2.00	10.23		
Tmin(-10°C)	DC 3.6V		8.27	2.00	10.27		
	DC 3.0V		8.50	2.00	10.50		
TMax(+50°C)	DC 3.6V		8.67	2.00	10.67		
	DC 3.0V		8.75	2.00	10.75		

802.11n20							
Test conditions		Channel/ Frequency	Measured power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)	Limit (dBm)	Result
Temperature (°C)	Voltage (V)						
TNor(+25°C)	DC 3.3V	5745	8.26	2.00	10.26	14.00	PASS
Tmin(-10°C)	DC 3.6V		8.48	2.00	10.48		
	DC 3.0V		8.21	2.00	10.21		
TMax(+50°C)	DC 3.6V		8.22	2.00	10.22		
	DC 3.0V		8.86	2.00	10.86		
TNor(+25°C)	DC 3.3V	5785	8.03	2.00	10.03		
Tmin(-10°C)	DC 3.6V		8.96	2.00	10.96		
	DC 3.0V		8.34	2.00	10.34		
TMax(+50°C)	DC 3.6V		8.71	2.00	10.71		
	DC 3.0V		8.62	2.00	10.62		
TNor(+25°C)	DC 3.3V	5825	8.95	2.00	10.95		
Tmin(-10°C)	DC 3.6V		8.94	2.00	10.94		
	DC 3.0V		8.85	2.00	10.85		
TMax(+50°C)	DC 3.6V		8.25	2.00	10.25		
	DC 3.0V		8.67	2.00	10.67		

802.11ac20							
Test conditions		Channel/ Frequency	Measured power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)	Limit (dBm)	Result
Temperature (°C)	Voltage (V)						
TNor(+25°C)	DC 3.3V	5745	8.14	2.00	10.14	14.00	PASS
Tmin(-10°C)	DC 3.6V		8.62	2.00	10.62		
	DC 3.0V		8.18	2.00	10.18		
TMax(+50°C)	DC 3.6V		8.08	2.00	10.08		
	DC 3.0V		8.80	2.00	10.80		
TNor(+25°C)	DC 3.3V	5785	8.07	2.00	10.07		
Tmin(-10°C)	DC 3.6V		8.19	2.00	10.19		
	DC 3.0V		8.95	2.00	10.95		
TMax(+50°C)	DC 3.6V		8.88	2.00	10.88		
	DC 3.0V		8.00	2.00	10.00		
TNor(+25°C)	DC 3.3V	5825	8.72	2.00	10.72		
Tmin(-10°C)	DC 3.6V		8.25	2.00	10.25		
	DC 3.0V		8.20	2.00	10.20		
TMax(+50°C)	DC 3.6V		8.67	2.00	10.67		
	DC 3.0V		8.02	2.00	10.02		

802.11n40							
Test conditions		Channel/ Frequency	Measured power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)	Limit (dBm)	Result
Temperature (°C)	Voltage (V)						
TNor(+25°C)	DC 3.3V	5755	8.13	2.00	10.13	14.00	PASS
Tmin(-10°C)	DC 3.6V		8.22	2.00	10.22		
	DC 3.0V		8.66	2.00	10.66		
TMax(+50°C)	DC 3.6V		8.82	2.00	10.82		
	DC 3.0V		8.98	2.00	10.98		
TNor(+25°C)	DC 3.3V	5795	8.15	2.00	10.15		
Tmin(-10°C)	DC 3.6V		8.67	2.00	10.67		
	DC 3.0V		8.89	2.00	10.89		
TMax(+50°C)	DC 3.6V		8.87	2.00	10.87		
	DC 3.0V		8.87	2.00	10.87		

802.11ac40							
Test conditions		Channel/ Frequency	Measured power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)	Limit (dBm)	Result
Temperature (°C)	Voltage (V)						
TNor(+25°C)	DC 3.3V	5755	8.33	2.00	10.33	14.00	PASS
Tmin(-10°C)	DC 3.6V		8.15	2.00	10.15		
	DC 3.0V		9.00	2.00	11.00		
TMax(+50°C)	DC 3.6V		8.39	2.00	10.39		
	DC 3.0V		8.72	2.00	10.72		
TNor(+25°C)	DC 3.3V	5795	8.59	2.00	10.59		
Tmin(-10°C)	DC 3.6V		8.64	2.00	10.64		
	DC 3.0V		8.81	2.00	10.81		
TMax(+50°C)	DC 3.6V		8.05	2.00	10.05		
	DC 3.0V		8.57	2.00	10.57		

802.11ac80							
Test conditions		Channel/ Frequency	Measured power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)	Limit (dBm)	Result
Temperature (°C)	Voltage (V)						
TNor(+25°C)	DC 3.3V	5775	8.81	2.00	10.81	14.00	PASS
Tmin(-10°C)	DC 3.6V		8.07	2.00	10.07		
	DC 3.0V		8.30	2.00	10.30		
TMax(+50°C)	DC 3.6V		8.99	2.00	10.99		
	DC 3.0V		8.85	2.00	10.85		


4.2. Permitted Range of Operating Frequencies

LIMIT

According to ETSI EN 300 440 clause 4.2.3.5

Frequency range Limit	
$F_{Low} > 2400.0\text{MHz}$	$F_{High} < 2483.5\text{M}$

TEST CONFIGURATION

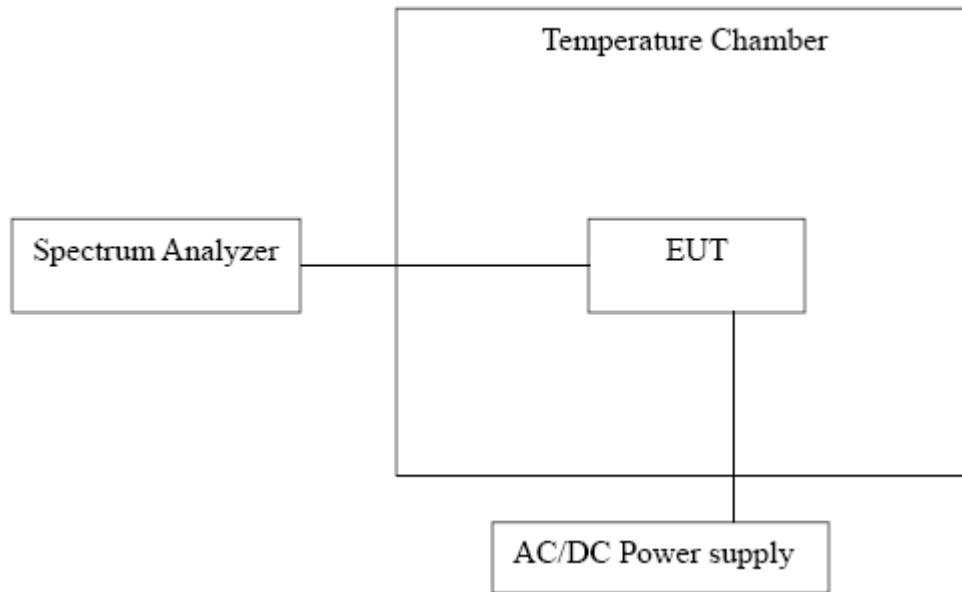

TEST PROCEDURE

1. Please refer to ETSI EN 300 440 clause 5 for the test conditions.
2. Please refer to ETSI EN 300 440 clause 4.2.3.3 for the measurement method.

TEST RESULTS

802.11a			
Antenna Gain: 0.88dBi		Test Method: Conducted	
Test Condition			
Test environmental			
Temperature (°C)	Voltage (V)	fL Low	fH High
T Nor (25°C)	DC 3.3V	5736.862603	5832.184058
T min (-10°C)	DC 3.6V	5736.885544	5832.159915
T min (-10°C)	DC 3.0V	5736.877383	5832.134609
T Max (+50°C)	DC 3.6V	5736.898423	5832.112633
T Max (+50°C)	DC 3.0V	5736.807740	5832.182502
Limits		>5725MHz	<5875M
Result		Pass	

802.11n20			
Antenna Gain: 0.88dBi		Test Method: Conducted	
Test Condition			
Test environmental			
Temperature (°C)	Voltage (V)	fL Low	fH High
T Nor (25°C)	DC 3.3V	5736.804971	5832.166901
T min (-10°C)	DC 3.6V	5736.879540	5832.160136
T min (-10°C)	DC 3.0V	5736.862166	5832.160169
T Max (+50°C)	DC 3.6V	5736.886756	5832.104747
T Max (+50°C)	DC 3.0V	5736.805414	5832.107159
Limits		>5725MHz	<5875M
Result		Pass	

802.11ac20			
Antenna Gain: 0.88dBi		Test Method: Conducted	
Test Condition			
Test environmental			
Temperature (°C)	Voltage (V)	fL Low	fH High
T Nor (25℃)	DC 3.3V	5736.807327	5832.199065
T min (-10℃)	DC 3.6V	5736.809519	5832.179219
T min (-10℃)	DC 3.0V	5736.812577	5832.115134
T Max (+50℃)	DC 3.6V	5736.818747	5832.128048
T Max (+50℃)	DC 3.0V	5736.869774	5832.147306
Limits		>5725MHz	<5875M
Result		Pass	

802.11n40			
Antenna Gain: 0.88dBi		Test Method: Conducted	
Test Condition			
Test environmental			
Temperature (℃)	Voltage (V)	fL Low	fH High
T Nor (25℃)	DC 3.3V	5737.801846	5817.850806
T min (-10℃)	DC 3.6V	5737.875497	5817.801024
T min (-10℃)	DC 3.0V	5737.860892	5817.850577
T Max (+50℃)	DC 3.6V	5737.804871	5817.853399
T Max (+50℃)	DC 3.0V	5737.875043	5817.822884
Limits		>5725MHz	<5875M
Result		Pass	

802.11ac40			
Antenna Gain: 0.88dBi		Test Method: Conducted	
Test Condition			
Test environmental			
Temperature (°C)	Voltage (V)	fL Low	fH High
T Nor (25℃)	DC 3.3V	5737.875673	5817.877624
T min (-10℃)	DC 3.6V	5737.802215	5817.896334
T min (-10℃)	DC 3.0V	5737.835095	5817.847150
T Max (+50℃)	DC 3.6V	5737.893396	5817.802725
T Max (+50℃)	DC 3.0V	5737.807951	5817.874110
Limits		>5725MHz	<5875M
Result		Pass	

802.11ac80			
Antenna Gain: 0.88dBi		Test Method: Conducted	
Test Condition			
Test environmental			
Temperature (°C)	Voltage (V)	fL Low	fH High
T Nor (25℃)	DC 3.3V	5737.852437	5817.824861
T min (-10℃)	DC 3.6V	5737.886461	5817.882708
T min (-10℃)	DC 3.0V	5737.813132	5817.887559
T Max (+50℃)	DC 3.6V	5737.846972	5817.885673
T Max (+50℃)	DC 3.0V	5737.892966	5817.805522
Limits		>5725MHz	<5875M
Result		Pass	

4.3. Spurious emissions and cabinet



LIMIT

The power of the spurious emissions shall not exceed the limits of table



State	47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies $\leq 1\ 000$ MHz	Frequencies $> 1\ 000$ MHz
Operating	4 nW /-54dBm	250 nW/-36dBm	1 μ W /-30dBm
Standby	2 nW /-57dBm	2 nW /-57dBm	20 nW /-47dBm

TEST CONFIGURATION

Below 1GHz

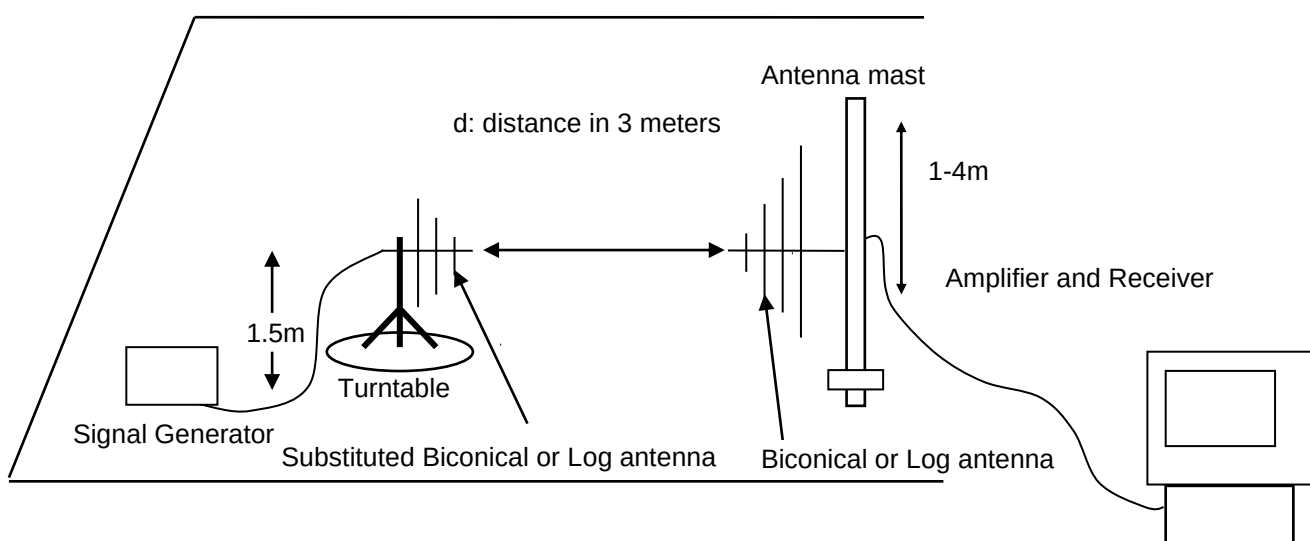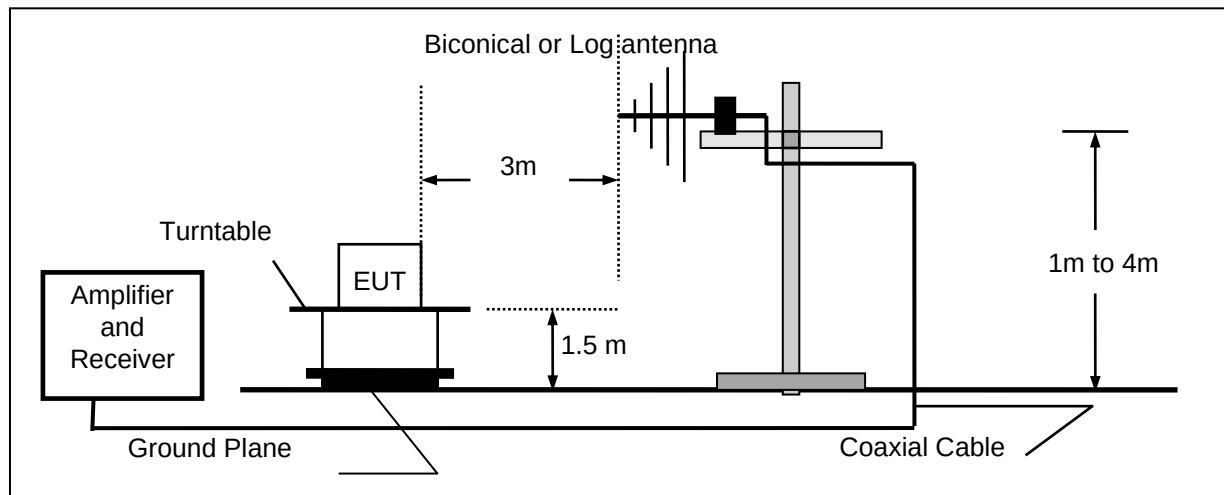

Above 1GHz

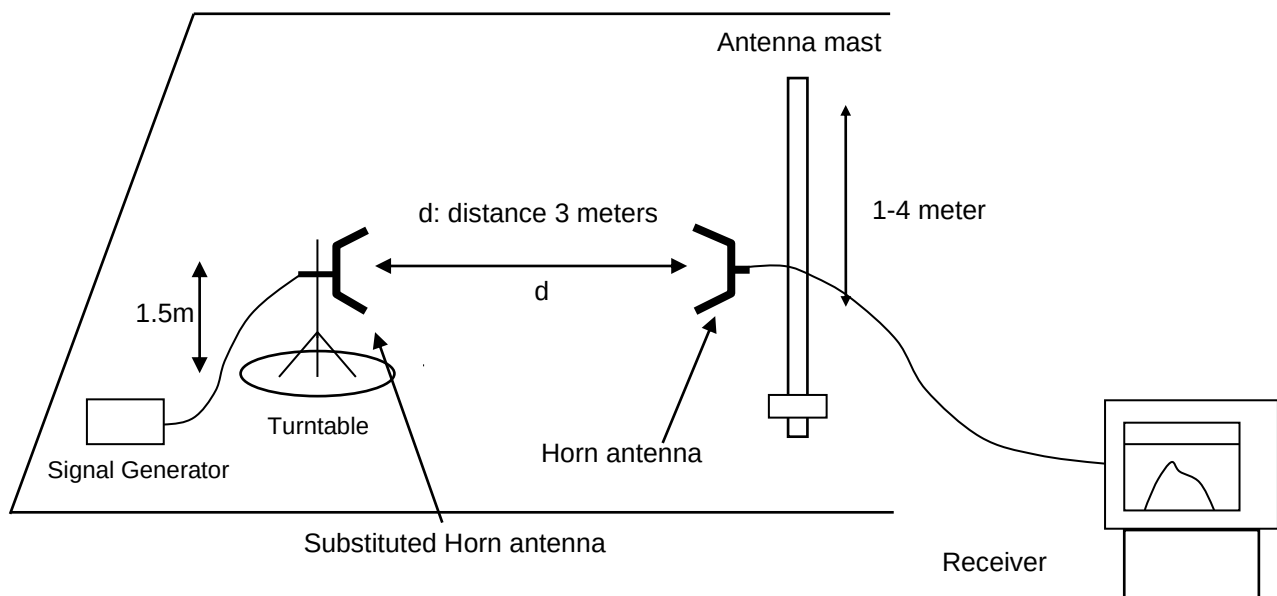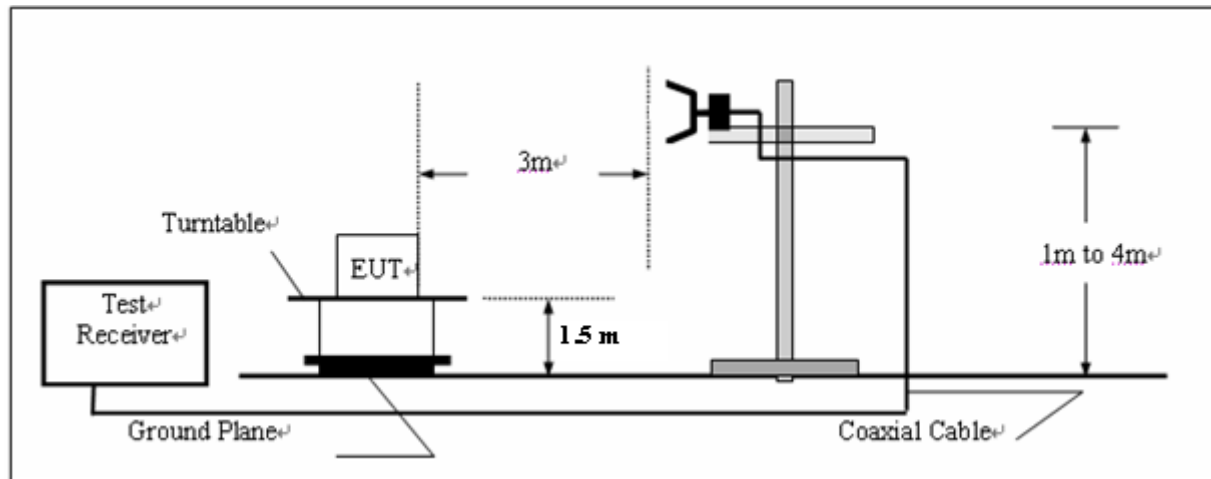**TEST PROCEDURE**

1. Please refer to ETSI EN 300 440 clause 5 for the test conditions.
2. Please refer to ETSI EN 300 440 clause 4.2.4.3 for the measurement method.

TEST RESULTS

Note :We tested the all modes,and recorded the worst case at the 802.11n 20 Mode.

The Worst Test Mode 802.11n20				
Frequency (MHz)	Test Data		Limit (dBm)	Conclusion
	Polarization	Level (dBm)		
Lowest Channel				
294.54	Vertical	-49.00	-36.00	Pass
592.19	V	-52.82	-36.00	
1794.77	V	-42.92	-30.00	
2692.11	V	-41.70	-30.00	
313.46	Horizontal	-50.47	-36.00	
471.38	H	-52.40	-36.00	
1794.81	H	-42.25	-30.00	
2692.12	H	-45.34	-30.00	
Middle Channel				
301.04	Vertical	-49.93	-36.00	Pass
548.86	V	-50.76	-36.00	
1794.82	V	-42.23	-30.00	
2692.25	V	-40.39	-30.00	
328.95	Horizontal	-51.86	-36.00	
522.55	H	-48.50	-36.00	
1794.86	H	-49.54	-30.00	
2692.12	H	-44.84	-30.00	
Highest Channel				
264.70	Vertical	-49.70	-36.00	Pass
584.41	V	-49.13	-36.00	
1794.78	V	-48.04	-30.00	
2692.20	V	-47.36	-30.00	
313.37	Horizontal	-50.48	-36.00	
549.47	H	-54.47	-36.00	
1794.71	H	-42.21	-30.00	
2692.27	H	-47.90	-30.00	

4.4. Duty cycle

According to ETSI EN 300 440 clause 4.2.5.4

Table 4 defines the maximum duty cycle within a 1 hour period.

Table 4: Duty cycle limits

Frequency Band	Duty cycle	Application	Notes
2 400 MHz to 2 483,5 MHz	No Restriction	Generic use	
2 400 MHz to 2 483,5 MHz	No Restriction	Detection, movement and alert applications	
(a) 2 446 MHz to 2 454 MHz	No Restriction	RFID	Limits shown in annex D shall apply
(b) 2 446 MHz to 2 454 MHz	≤ 15 %	RFID	Limits shown in annex D shall apply
5 725 MHz to 5 875 MHz	No Restriction	Generic use	
9 200 MHz to 9 500 MHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
9 500 MHz to 9 975 MHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
10,5 GHz to 10,6 GHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
13,4 GHz to 14,0 GHz	No Restriction	Radiodetermination: radar, detection, movement and alert applications	
17,1 GHz to 17,3 GHz	DAA or equivalent techniques	Radiodetermination: GBSAR detecting and movement and alert applications	Limits shown in annex F shall apply
24,00 GHz to 24,25 GHz	No Restriction	Generic use and for Radiodetermination: radar, detection, movement and alert applications	

TEST RESULTS

this test item is not applicable for this EUT.

4.5. Receiver Emissions

LIMIT

The power of any spurious emission shall not exceed 2 nW in the range 25 MHz to 1 GHz and shall not exceed 20 nW on frequencies above 1 GHz.

TEST CONFIGURATION

The same as described in section 4.4

TEST PROCEDURE

1. Please refer to ETSI EN 300 440 Sub-clause 5 for the test conditions.
2. Please refer to ETSI EN 300 440 Sub-clause 4.3.5.4 for the measurement method.

TEST RESULTS

The Worst Test Mode 802.11n20				
Frequency (MHz)	Test Data		Limit (dBm)	Conclusion
	Polarization	Level (dBm)		
Lowest Channel				
62.79	Vertical	-74.51	-57.00	Pass
919.50	V	-68.80	-57.00	
1554.01	V	-59.81	-47.00	
1980.06	V	-64.00	-47.00	
200.10	Horizontal	-68.89	-57.00	
533.57	H	-74.09	-57.00	
1451.94	H	-57.77	-47.00	
1971.53	H	-61.46	-47.00	
Middle Channel				
62.79	Vertical	-71.61	-57.00	Pass
919.50	V	-76.68	-57.00	
1551.21	V	-61.81	-47.00	
2221.58	V	-66.90	-47.00	
294.04	Horizontal	-67.67	-57.00	
513.14	H	-74.72	-57.00	
1495.02	H	-60.51	-47.00	
1951.70	H	-63.75	-47.00	
Highest Channel				
62.79	Vertical	-74.06	-57.00	Pass
919.50	V	-73.85	-57.00	
1539.53	V	-60.90	-47.00	
1960.40	V	-57.35	-47.00	
224.43	Horizontal	-74.97	-57.00	
445.62	H	-75.03	-57.00	
1305.58	H	-58.45	-47.00	
2297.82	H	-65.82	-47.00	

4.6. ADJACENT CHANNEL SELECTIVITY

Definition and Limit

The adjacent channel selectivity is a measure of the capability of the receiver to operate satisfactorily in the presence of an unwanted signal that differs in frequency from the wanted signal by an amount equal to the adjacent channel. The adjacent channel selectivity of the equipment under specified conditions shall not be less than the levels of the unwanted signal as stated in table 6.

Table 6: Limit for adjacent channel selectivity

Receiver category	Limit
1	-30 dBm + k
2	No limit
3	No limit

The correction factor, k, is as follows:

$$k = -20\log f - 10\log BW$$

Where:

- f is the frequency in GHz;
- BW is the channel bandwidth in MHz.

The factor k is limited within the following:

$$-40 < k < 0 \text{ dB.}$$

Test Procedure

Please refer to ETSI EN 300 440 clause 4.3.3.3 for the measurement method.

Test Result

Pass.

Receiver category: 1 (The Worst Test Result)								
Test Channel (Worst Case)		The signal of adjacent channel(signal generator B)						
		Adjacent channel		BW (MHz)	K (dB)	Test Value (dBm)	Limit (dBm)	Verdict
157	5785MHz	153	5765MHz(lower)	20	-28.26	-46.32	≥ -58.26	Pass
		161	5805MHz(upper)	20	-28.26	-47.08	≥ -58.26	Pass
151	5755MHz	/	5715MHz(lower)	40	-31.22	-55.69	≥ -61.22	Pass
		159	5805MHz(upper)	40	-31.22	-57.28	≥ -61.22	Pass
155	5775MHz	/	5715MHz(lower)	80	-34.26	-58.14	≥ -64.26	Pass
		/	5805MHz(upper)	80	-34.26	-59.63	≥ -64.26	Pass

Note: The BW(channel bandwidth) is 20MHz which is declared by the manufacturer of the equipment.

4.7. BLOCKING OR DESENSITIZATION

Definition and Limit

Blocking is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted input signal at any frequencies other than those of the spurious responses or the adjacent channels or bands, see clauses 4.3.3 and 4.3.4.

The blocking level, for any frequency within the specified ranges, shall not be less than the values given in table 7, except at frequencies on which spurious responses are found.

Table 7: Limits for blocking or desensitization

Receiver category	Limit
1	-30 dBm + k
2	-45 dBm + k
3	No limit

The correction factor, k, is as follows:

Where:

- f is the frequency in GHz;
- BW is the channel bandwidth in MHz.

The factor k is limited within the following:

$$-40 < k < 0 \text{ dB}$$

Test Procedure

Please refer to ETSI EN 300 440 clause 4.3.4.3 for the measurement method.


Test Result

Pass

Receiver category: 1 (The Worst Test Result)									
Test Channel (Worst Case)		Lower or upper	Spacing	Frequency (MHz)	BW (MHz)	K (dB)	Test Value (dBm)	Limit (dBm)	Verdict
157	5785MHz	Lower	10*BW	5575	20	-28.26	-20.13	≥ -58.26	Pass
			20*BW	5375	20	-28.26	-15.41	≥ -58.26	Pass
			50*BW	4775	20	-28.26	-10.74	≥ -58.26	Pass
		Upper	10*BW	5995	20	-28.26	-17.18	≥ -58.26	Pass
			20*BW	6195	20	-28.26	-14.09	≥ -58.26	Pass
			50*BW	6795	20	-28.26	-11.85	≥ -58.26	Pass
151	5755MHz	Lower	10*BW	5325	40	-31.22	-9.36	≥ -61.22	Pass
			20*BW	4925	40	-31.22	-5.47	≥ -61.22	Pass
			50*BW	3725	40	-31.22	-0.41	≥ -61.22	Pass
		Upper	10*BW	6175	40	-31.22	-2.36	≥ -61.22	Pass
			20*BW	6575	40	-31.22	2.78	≥ -61.22	Pass
			50*BW	7775	40	-31.22	5.17	≥ -61.22	Pass
155	5775MHz	Lower	10*BW	4935	80	-34.26	6.98	≥ -64.26	Pass
			20*BW	4135	80	-34.26	7.35	≥ -64.26	Pass
			50*BW	1735	80	-34.26	10.17	≥ -64.26	Pass
		Upper	10*BW	6615	80	-34.26	5.66	≥ -64.26	Pass
			20*BW	7415	80	-34.26	11.69	≥ -64.26	Pass
			50*BW	9815	80	-34.26	13.55	≥ -64.26	Pass

Note: The BW(channel bandwidth) is 20MHz which is declared by the manufacturer of the equipment.

5. TEST SETUP PHOTOS OF THE EUT

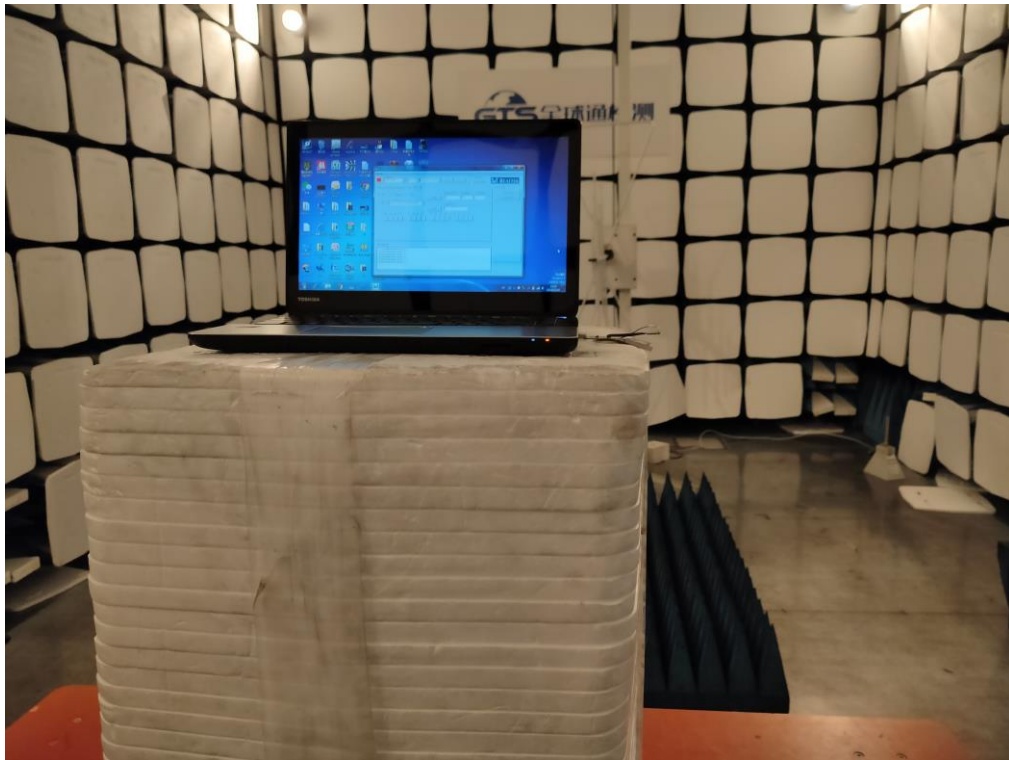

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No. GTS20191209006-2-27

.....End of Report.....